

BMC HOLDER

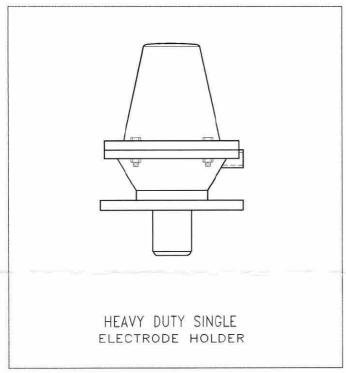

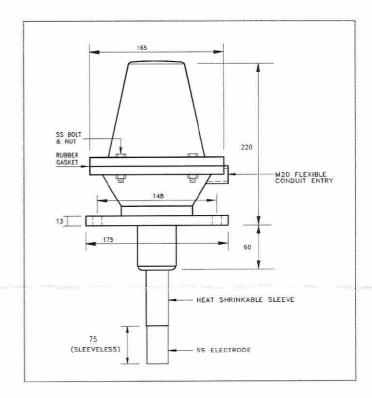

13th May 2005

TECHNICAL INFORMATION

A. DESCRIPTION:

BMC compound is a high performance fibre reinforced thermosetting precision moulding material. It can provide more outstanding properties than metal or plastic by the way of professional formula. Bulk Moulding Compound is a compression moulding grade which gives excellent surface finish for electric components. Also suitable for injection and transfer moulding. This grade has good electrical and fire retardant properties.

B. SPECIFICATIONS:

- Good stand to high moisture and heat and low linear expansion coefficient.
- Good mechanical strength and electrical property.
- The HDT(Heat Distortion Temperature) can stand over to 200 °C.
- UV Resistant.
- Good flame resistance can meet UL-94 standard.
- Chemical resistant.

C. APPLICATIONS:

Ideal for level of any conductive liquid (sewage and water).

- Water pump control.
- Water tank level alarm indication.

D. ELECTRODE:

3/4" Dia. Stainless Steel 316 Electrode encapsulated in heat shrinkable sleeving.